

Aputure®

MC

プロダクト マニュアル

日本語

Foreward

Thank you for purchasing the Aputure MC.

Instructions

- Please read this product manual carefully.
- Keep this product manual and always include it when passing the product onto third parties.



WARNING: Do not place the product near any corrosive chemicals. Corrosion may cause the product to malfunction.

- Only use a microfiber or dry cloth to clean the product.
- Be careful to not damage the light by dropping it or otherwise introducing physical shock.
- Do not leave the product in excessive heat, high temperatures can cause the product to malfunction.
- Please have the product checked by the authorized service or agent if your product has some problems. Please note that this warranty does not apply to repair arising out of the malfunction of unauthorized disassembly, although you may request such repairs on a chargeable basis.
- Use of original Aputure cable accessories is recommended. Please note that this warranty does not apply to repairs arising out of the malfunction of non-original Aputure accessories, although you may request such repairs on a chargeable basis.
- The product is certificated by RoHS and CE. Please operate the product in full compliance with the operation standards. Please note that this warranty does not apply to repair arising from malfunction, although you may request such repairs on a chargeable basis.
- The instructions and information in this manual are based on thorough, controlled company testing procedures. Further notice will not be given if the design and specifications change.

Intended Use


Intended use of the Aputure MC includes:

- The user has read the instructions of this manual.
- The user is using the products within the operating conditions and limitations described in this product manual.


“Improper use” means using the products other than as described in these instructions or under operating conditions which differ from those described herein.

アイテムリスト


パッケージ アイテムリスト:




MC (1 pc)



Silicone Rubber Diffuser
(1 pc)



Adhesive Mounting Tape
(2 pairs)





USB Type-C Charging Cable
(1 pc)



Carrying Case (1 pc)

プロダクト

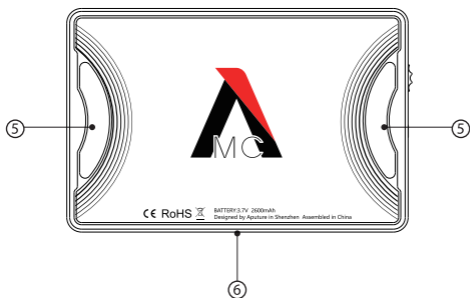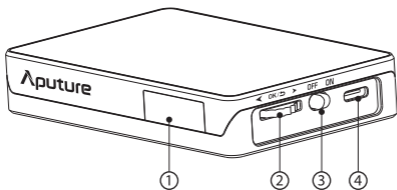


- ① 有機ELディスプレイ
- ② コントロールウィール
- ③ パワースイッチ
- ④ USB Type-C 充電ポート
- ⑤ マグネット
- ⑥ 1/4" -20 ネジ穴

操作方法

1. 充電

1). Type C 充電


端末が充電されている時は、バッテリーの残量アイコンが点滅します。
充電が完了したらバッテリー残量アイコンがフルの表示になります。

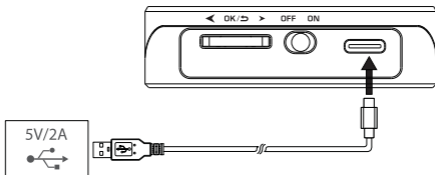

- * 5V/2Aのモバイルバッテリー充電に対応
- * USB-C PD 急速充電対応
- * バッテリー残量が少ないとアイコンが点滅します

2). ワイヤレス充電


MCはQiのワイヤレス充電に対応しています。
5W Qi規格対応のワイヤレス充電器で充電出来ます。

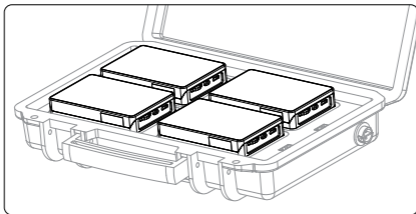

- * MCを充電する際は、ライトを消してから充電してください。
点灯しながらの充電は、充電スピードが遅くなります。

2. 電源 ON/OFF

電源はスイッチの操作でONとOFFに出来ます



3. CCT モード

システムメニューを開くには、コントロールウィールを2秒以上押します。

コントロールウィールを回して【CCT】を選択します。

CCTモードでは、コントロールウィールを回して色温度を3200-6500Kに変更できます。

設定の切り替えは、コントロールウィールを押して変更出来ます。

【INT】は、0-100%に調節可能。



*Sidus Link appを使用する事で、より細かな操作と設定が出来ます。

4. HSI モード

システムメニューを開くには、コントロールウィールを2秒以上押します。

コントロールウィールを回して【HSI】を選択します。

HSIモードでは、コントロールウィールを回して【HUE・SAT・INT】(色彩・彩度・光量)の設定を変えれます。

設定の選択は、コントロールウィールを押して出来ます。

【HUE】は、0-360°に調節可能。

【SAT】は、0-100%に調節可能。

【INT】は、0-100%に調節可能。



5.FX モード

システムメニューを開くには、コントロールウィールを2秒以上押します。

コントロールウィールを回して【FX】を選択します。


FXモードでは、コントロールウィールを回して【Paparazzi・Fireworks・Faulty Bulb・TV・Lightning・Party・Pulsing・Cop car・Fire】に設定を変えます。

設定の選択は、コントロールウィールを押して出来ます。


各FXは、光量設定を調節できます。設定するにはコントロールウィールを押して【INT】設定で変更します。【INT】は、0-100%に調節可能。




(1) パパラッチ




(2) 花火




(3) 壊れた電球




(4) テレビ




(5) 雷




(6) パーティー




(7) 脈



(8) バトカー



(9) 焚火



6. Bluetooth モード


システムメニューを開くには、コントロールウィールを2秒以上押します。

コントロールウィールを回して【BT】を選択します。


BT Resetモードでは、コントロールウィールを回して【YES】を選択すればBluetoothのペアリングを行えます。Sidus Linkに接続する際に使用します。

【NO】を選択すればシステムメニューへ戻ります。



設定の選択は、コントロールウィールを押して出来ます。





7. シリコンデフューザーの付け方



8. マジックテープの使い方



9. マグネットの使い方



* MCライトは80°以上の場所では使用しないで下さい。
故障の原因になります。

10. Sidus Link APPの使い方

スマートフォンをとおしてのライト操作が可能になる Sidus Link appはApp store又はGoogle playからダウンロード出来ます。

アプリに関する情報は [sidus.link/app/help](https://www.aputure.com/sidus.link/app/help) のサイトから、より詳しく調べる事が出来ます。 Sidus LinkはiOSとAndroidに対応しています。



スペック

色温度		3200-6500K		
CRI		96+		
TLCI		97+		
ルミナンス	距離	0.3M	0.5M	1M
	光量(ルクス)	1100 lux	400 lux	100 lux
バッテリー		リチウムポリマー電池 (3.7V 2600mAh)		
消費電力		5W		
本体温度		0 °C to 45 °C		
バッテリー駆動時間		最大出力	最低出力	
		>2時間	>15時間	
充電時間		~1.5 時間 (USB PD)		
		~2時間 (USB DC 5V/2A)		
		~3.5 時間 (ワイヤレス充電)		
本体寸法		93x61x17mm/3.66x2.40x0.67in		

* 光量(ルクス)は、各MCライトで数値が多少異なる可能性があります。

Aputure®

GUARANTEE CARD

Serial No.	
Item Name	
Purchase Date	
Buyer Name	
Buyer Phone	
Buyer Add	
Franchiser Seal	

Aputure®

Aputure Imaging Industries Co., Ltd.

Inspection: Qualified

Add: F/3, Building 21, Longjun Industrial Estate, HePing West Road, Shenzhen, Guangdong

Service Warranty (EN)

Aputure Imaging Industries Co., Ltd. warrants the original consumer purchaser from defects in material and workmanship for a period of one (1) year after the date of purchase. For more details of warranty visit www.aputure.com

Important:

Keep your original sales receipt. Be sure the dealer has written on it the date, serial No. of the product. This information is required for warranty service.

This warranty does not cover:

- Damage that is the result of misuse, abuse, accident (including but not limited to damage by water), faulty connection, defective or maladjusted associated equipment, or the use of the product with equipment for which it was not intended.
- Cosmetic defects that appear more than thirty (30) days after the date of purchase. Cosmetic damage caused by improper handling is also excluded.
- Damage that occurs while the product is being shipped to whoever will service it.

This warranty is void if:

- The product identification or serial No. label is removed or defaced in any way.
- The product is serviced or repaired by any one other than Aputure or an authorized Aputure dealer or service agency.

Aputure Imaging Industries Co., Ltd.

Add: F/3, Building 21, Longjun industrial estate,
HePing West Road, Shenzhen, Guangdong

E-MAIL: cs@aputure.com

Sales Contact: (86)0755-83285569-613